


## Part & Package Color Key

PART NO.	PART COLOR	PACKAGE COLOR
I-1	Y	R

<b>PART COLORS</b>	<b>PACKAGE COLORS</b>
Y = Yellow	S = Silver (Equine System)
B = Black	R = Red (Standard System)
W = White	Y = Yellow (High Tensile System)
X = Metal	B = Blue (Solutions System)

## High Tensile Electric Fence

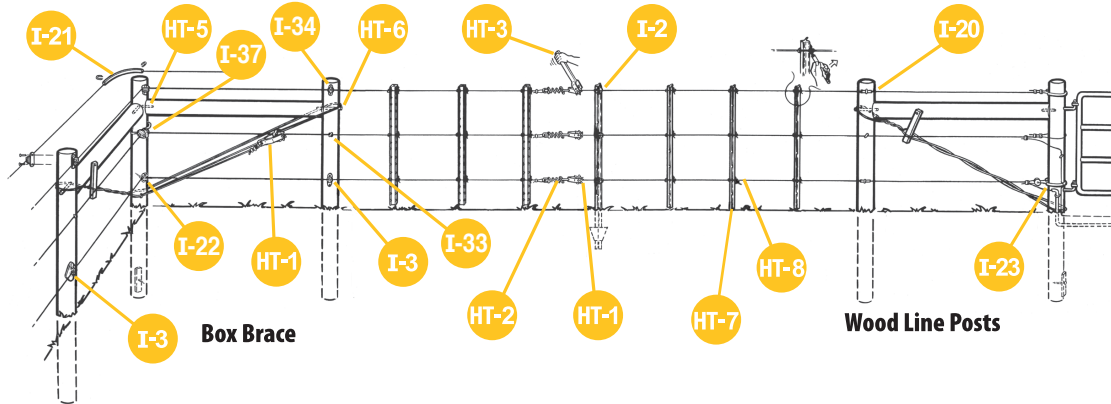

## High Tensile System Components

### ELECTRIC FENCE ACCESSORIES

**A-1 ELECTRIC FENCE WARNING SIGN.** Printed both sides - 4" x 8".

### ELECTRIC FENCE CONNECTORS

**C-4 SPLICING SLEEVES.** Used to splice two wires. 14.5 and 15.5 GA smooth wire.

**C-5 SPLICING SLEEVES.** Used to splice two wires. 12.5 GA smooth wire (.099" to .114").

**C-6 SLICING SLEEVES.** Used to splice two wires. 12.5 GA smooth wire.

**C-7 SPLICING SLEEVES.** For 10 to 11 GA smooth wire. 14 and 15.5 GA barbed.

**C-8 SPLICING SLEEVES.** For 9 GA smooth wire. 12.5 and 13.5 GA barbed.

**C-12 EXTRA LENGTH WIRE SPLICING SLEEVES.** Use to splice 12.5 GA smooth wire.

### GATES & GATE HANDLES

**H-1 RUBBER GATE HANDLE.** Enclosed spring stretches 3.5". (H-1) Yellow.

**H-5 POLYCARBONATE GATE HANDLE.** Extra strong and shock resistant.

**H-6 ELECTRIC STRETCH GATE.** Bungee cord stretches to fit gate openings up to 20". For wood posts and t-posts.

### HIGH TENSILE FENCE COMPONENTS

**HT-1 WIRE STRAINER.** Hot dip zinc frame with spring brake. High tensile.

**HT-2 TENSION MEASURING SPRING.** Hot dip zinc. Exceeds class III.

**HT-3 STRAINER CRANK HANDLE.**

Universal - fits all.

**HT-4 GALVANIZED BARBED STAPLES.** 2" X 9 GA.

**HT-5 5" BRACE PIN.** For high tensile fence end and corner braces.

**HT-6 10" BRACE PIN.** For high tensile fence end and corner braces.

**HT-7 FIBERGLASS BATTENS.** For spacing wires.

**HT-8 SPACER CLIP**

**HT-11 STAINLESS STEEL WIRE STRAINER.** Suitable for high tensile.

### ELECTRIC FENCE INSULATORS

**I-2 PINLOCK INSULATOR FOR T-POSTS.**

For 1.25 and 1.33 lb/ft posts. For wire sizes up to 1/4" diam. Suitable for high tensile. (I-2BY) Black.

### I-3 PINLOCK INSULATOR FOR WOOD POSTS.

Complete with 2 galvanized ring-shank nails. For wire sizes up to 1/4" diam. Suitable for high tensile. (I-3BY) Black.

### I-20 4" TUBE INSULATOR FOR WOOD POSTS.

Without staple. (I-20BY) Black.

### I-21 TUBULAR CORNER & END POST INSULATOR.

Suitable for high tensile. (I-21BY) Black.

### I-22 CORNER POST BRACKET KIT.

Suitable for high tensile. (I-22WY) White, (I-22BY) Black, (I-22WS) White.

### I-23 HIGH STRAIN CORNER & END INSULATOR.

Engineering grade material. Suitable for high tensile. (I-23BY) Black.

### I-24 50FT COIL INSULATOR TUBING.

For insulating smooth wire. (I-24BB) Black.

### I-33 WOOD POST STAPLE INSULATOR.

Suitable for high tensile permanent electric fence. (I-33BY) Black.

### I-34 WOOD POST INSULATOR.

Carries the strain of fence wire 13/16" from post. 1.75" flange stops arcing. Nails Included. (I-34BY) Black.

### I-37 HEAVY DUTY CORNER INSULATOR.

Withstands the strain of high tensile wire. Ideal for polyrope corners/ends. (I-37WY) White.

### LIGHTNING PROTECTION ACCESSORIES

#### L-2 LIGHTNING ARRESTOR.

Helps protect fence and energizer, diverts lightning to the ground. Complete with clamps for wire and ground. Best for high tensile.

#### TOOLS FOR ELECTRIC FENCE

##### T-2 SPINNING JENNY/DEREELER w/ BRAKE.

Knock-down style. Assembly required. Adjusts to hold 17", 19" and 23" ID coils of high tensile wire.

##### T-4 2 SLOT FENCE SPLICING TOOL.

For quick, trouble-free splices. Use with C-5, C-6 sleeves and C-9 fence taps, 12" overall.

